

**OFFICE OF THE ASSISTANT DIRECTOR OF HORTICULTURE,
SONEPUR**

At;-Bada Jhinki,Near:- KVK,Sonepur, Po:-Sonepur, Dist: Sonepur Pin:- 767017

Order .No 191 / ADH,

Dt.17.02.2024

1. Short Tender Call Notice is invited on behalf of Governor of Odisha from Registered and eligible Civil Contrators of the State PWD/Water Resources / Rural work / CPWD for the following works. The details of the work are given below.

Sl. No.	Name of the Work	Location	Tender amount in Rs.	EMD (Rs.)	Cost of Tender Paper (Rs.)	Class of Contractor	Time of Completion
1	2	3	4	5	6	7	8
1.	Construction of Working Shed	Hort.Farm, Sonepur	405354/-	1% of the tender amount	2000/-	D or C	20 Days
2.	Construction Farm Gate-1		156338/-	1% of the tender amount	600/-	D or C	20 Days
3	Construction Farm Gate-2		168365/-	1% of the tender amount	600/-	D or C	20 Days

2. Bid documents consisting of detailed schedule of quantities and set of terms and conditions of contract and other necessary documents can be obtained & deposited in the office of the undersigned as per following :

1.	Bid documents available in website https://subarnapur.nic.in/	Dt. 19/02/2024 to Dt. 28/02/2024 Up to 1.00 PM
2.	Last Date of Receipt of Tender Paper and other required document in tender box at O/o Assistant Director of Horticulture, Sonepur.	Dt. 28/02/2024 Up to 4.00 PM
3.	Date of opening of Tender Paper	Dt. 29/02/2024 At 11.00 AM


3. The bids shall be opened in the presence of the bidders or his authorized agents who wish to attend.
4. The cost of Bid documents in shape of demand draft issued from any nationalized scheduled bank should be prepared in the name of the **Assistant Director of Horticulture; Sonepur**.The Bid cost shall be deposited in shape of Bank Draft prepared on or before the last date of receipt along with bid documents.
5. The earnest money deposit / bid security (1%) in shape of any one of the from i.e. Deposit receipt of Nationalized Bank / Kissan Vikash Patra / Post Office Saving Bank account / National Saving Certificate / Postal Office Time Deposit / Bank draft. Account duly pledged in favour of the **Assistant Director of Horticulture, Sonepur** payable along with the bid documents.
6. The Successful bidder is required to submit the Annual Performance Security (as per the latest circular of Govt. of Odisha) in shape of T.D.R, NSC, KVP pledge in favour of **Assistant Director of Horticulture, Sonepur**, if their quoted amount is less than the 5% of tender value.
7. As per the Rule – 13 of appendix – VIII OPWD Code Vol- II, the contractor has to deposit 1% bid amount at the time of drawl of Agreement as Initial Security Deposit.

[P.T.O]

8. Besides, C & D Class Contractor will be required to furnish security deposit by way deduction from their bill at the rate of 3 %. This will be refunded to the contractor after 6-month from date of completion of work.
9. The contractors are required to provide IT 1% of the bill amount, CGST and SGST 1% each of the bill amount, and labor CESS 1% of the bill amount as a deduction from their bill.
10. The bid documents can be submitted only on working days from 10 A.M to 5 P.M.
11. The authority reserves the right to reject any or all the tenders so received without assigning any reason thereof.


Bidders shall have to submit photo copies of:

- i. Contractor Registration Certificate.
- ii. PAN Card.
- iii. GST registration certificate.
- iv. Correspondence address, mobile number and mail id of the bidder.
- v. Bank Draft Original (Tender Paper Cost)
- vi. Affidavit for SC/ST and Engineering contractor.
- vii. Any corrigendum or modification to this advertisement shall only be made through NIC website which may be referred regularly.


**Assistant Director of Horticulture,
Sonepur**


Memo No. 192 /ADH Dated the, 17.02.2024

Copy to the A.H.O Sonepur / Dunguripali / Tarava, AAE O/o ADH,Sonepur for information and necessary action with a request to float the notice in their office in a prominent place for wide circulation.


**Assistant Director of Horticulture,
Sonepur**


Memo No. 193/ADH Dated the,17.02.2024

Copy submitted to the Assistant Executive Engineer (Agril.), Sonepur, Executive Engineer (Hort), Northen Division Sambalpur for information and necessary action. They are requested to display in their notice Board for wide publication.


**Assistant Director of Horticulture,
Sonepur**

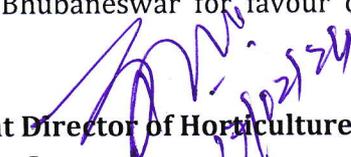
Memo No. 194 /ADH Dated the, 17.02.2024

Copy submitted to DIO, NIC Subarnapur for information and necessary action. He is requested publish this tender notice in district website.


**Assistant Director of Horticulture,
Sonepur**

Memo No. 195/ADH Dated the, 17.02.2024

Copy submitted to the Director of Horticulture, Odisha, Bhubaneswar for favour of kind information and necessary action.


**Assistant Director of Horticulture,
Sonepur**

Tender Schedule / Bill of Quantity

Tender Inviting Authority: Assistant Director of Horticulture, Sonapur					
Name of the Work: Farm Gate-1, Horticulture Farm, Sonapur					
Name of the Bidder:					
Percentage Rate Quoted:					
Less / Excess:					
Sl. No.	Description of Items	Qty	Unit	Rate	Amount
1	Earth work Excavation of foundation in hard soil within 50 m initial lead and 1.5 m initial lift including rough dressing and levelling as per the direction of engineer in charge	7.83	cum	208.88	1635.53
2	Filling foundation and plinth with sand well watered and rammed including cost and conveyance of materials.	4.61	cum	618.08	2849.97
3	C.C.(1:4:8) with 40 mm. size h.g. (C.B) metal in F&P including watering & curing etc.	1.05	cum	5378.29	5625.69
4	Brick work with Fly Ash brick (23x11x8 cm) having crushing strength not less than 75 Kg/cm ² with dimensional tolerance \pm 8 percent in cement mortar (1:6) in Super Structure	0.55	cum	5116.80	2829.59
5	R.C.C. work of M-20 grade with 20mm and down grade black hard granite (C.B.) stone chips including hoisting and laying in ground floor, per cum				
	(I) - RCC Column Base, Plinth	2.69	cum	6757.58	18198.16
	(III) -RCC Column and Beam	0.72	cum	6409.35	4627.55
6	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification in ground floor	5.315	Qntl	8853.74	47057.63
7	12 mm thick cement plaster in C.M.(1:6) over brick outside in ground floor	10.10	sqm	156.71	1582.77
8	Wall painting 2 coats with water proofing weather coat of approved shade to plastered surface both below and above plinth	10.10	sqm	85.12	859.71
9	Supplying, Fitting and Fixing of MS Fabricated Panelled Door/Window/Grills as per approved specification	435.07	Kg	153.28	66687.84
10	Priming 1 Coat to surface with red oxide primer on new iron work completely	19.78	sqm	66.60	1317.08
11	Painting 2 coats with approved paint on new iron work completely	19.78	cum	155.04	3066.07
Grand Total					156338
(Rupees One Lakh Fifty Six Thousand Three hundred Thirty Eight)only					
Amount Quoted (In Figure)					
Amount Quoted (In Words)					
Signature of the Bidder With Date & Seal					

NB:-Amount Quoted above are excluding of CGST 9% & SGST 9% and CESS 1% , which will be paid extra on the value of work executed as applicable.


 17/02/24
 Asst. Director of Horticulture
 Sonapur

Tender Schedule / Bill of Quantity

Tender Inviting Authority: Assistant Director of Horticulture, Sonepur					
Name of the Work: Farm Gate-2, Horticulture Farm, Sonepur					
Name of the Bidder:					
Percentage Rate Quoted:					
Less / Excess:					
Sl. No.	Description of Items	Qty	Unit	Rate	Amount
1	Earth work Excavation of foundation in hard soil within 50 m initial lead and 1.5 m initial lift including rough dressing and levelling as per the direction of engineer in charge	8.37	cum	204.72	1713.51
2	Filling foundation and plinth with sand well watered and rammed including cost and conveyance of materials.	4.75	cum	481.84	2286.81
3	C.C.(1:4:8) with 40 mm. size h.g. (C.B) metal in F&P including watering & curing etc.	1.08	cum	4899.72	5291.70
4	Brick work with Fly Ash brick (23x11x8 cm) having crushing strength not less than 75 Kg/cm ² with dimensional tolerance \pm 8 percent in cement mortar (1:6) in Super Structure	0.89	cum	4951.13	4381.75
5	R.C.C. work of M-20 grade with 20mm and down grade black hard granite (C.B.) stone chips including hoisting and laying in ground floor, per cum				
	(I) - RCC Column Base, Plinth	2.73	cum	6069.79	16552.32
	(III) -RCC Column and Beam	1.16	cum	15727.28	18165.01
6	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification in ground floor	6.131	Qntl	9136.76	56017.48
7	12 mm thick cement plaster in C.M.(1:6) over brick outside in ground floor	7.47	sqm	147.68	1103.76
8	Wall painting 2 coats with water proofing weather coat of approved shade to plastered surface both below and above plinth	7.47	sqm	84.17	629.09
9	Supplying, Fitting and Fixing of MS Fabricated Panelled Door/Window/Grills as per approved specification	475.20	Kg	121.00	57499.20
10	Priming 1 Coat to surface with red oxide primer on new iron work completely	21.60	sqm	65.74	1419.98
11	Painting 2 coats with approved paint on new iron work completely	21.60	cum	153.00	3304.80
Grand Total					168365
(Rupees One Lakh Sixty Eight Thousand Three hundred Sixty Five)only					
Amount Quoted (In Figure)					
Amount Quoted (In Words)					
Signature of the Bidder With Date & Seal					

NB:-Amount Quoted above are excluding of CGST 9% & SGST 9% and CESS 1% , which will be paid extra on the value of work executed as applicable.


 17/02/24
 Asst. Director of Horticulture
 Sonepur

Tender Schedule / Bill of Quantity

Tender Inviting Authority: Assistant Director of Horticulture, Sonapur					
Name of the Work: Working Shed, Horticulture Farm, Sonapur					
Name of the Bidder:					
Percentage Rate Quoted:					
Less / Excess:					
Sl. No.	Description of Items	Qty	Unit	Rate	Amount
1	Earth work Excavation of foundation in hard soil within 50 m initial lead and 1.5 m initial lift including rough dressing and levelling as per the direction of engineer in charge	25.70	cum	208.88	5369.05
2	Filling foundation and plinth with sand well watered and rammed including cost and conveyance of materials.	20.68	cum	618.08	12783.13
3	C.C.(1:4:8) with 40 mm. size h.g. (C.B) metal in F&P including watering & curing etc.	10.58	cum	5378.29	56923.82
4	Brick work with Fly Ash brick (23x11x8 cm) having crushing strength not less than 75 Kg/cm ² with dimensional tolerance \pm 8 percent in cement mortar (1:6) in Super Structure				
	Foundation and Plinth	5.23	cum	5008.40	26198.94
	Super Structure	4.56	cum	5041.40	22968.62
5	R.C.C. work of M-20 grade with 20mm and down grade black hard granite (C.B.) stone chips including hoisting and laying in ground floor, per cum				
	(I) - RCC Column Base, Plinth	5.21	cum	6757.58	35213.75
	(III) -RCC Column and Beam	1.52	cum	6409.35	9735.80
6	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification in ground floor	6.313	Qntl	8853.74	55893.66
7	12 mm thick cement plaster in C.M.(1:6) over brick outside in ground floor	57.60	sqm	156.71	9026.50
8	Iron work wrought and put up trusses and record racks	7.26	Qtl	12991.79	94268.43
9	Hoisting Joist and trusses and placing in position	7.26	Qtl	1022.87	7421.94
10	Labour For fixing GCI Sheet in roof drilling hole in wind ties including fixing of ridges valley and wind ties	76.50	Sqm	909.15	69549.98
Grand Total					405354
(Rupees Four Lakh Five Thousand Three hundred Fifty Four)only					
Amount Quoted (In Figure)					
Amount Quoted (In Words)					
Signature of the Bidder With Date & Seal					

NB:-Amount Quoted above are excluding of CGST 9% & SGST 9% and CESS 1% , which will be paid extra on the value of work executed as applicable.


 17/10/24
 Asst. Director of Horticulture
 Sonapur

BIO DATA OF THE BIDDER

1.	Name of the Bidder	:	
2.	Present Address	:-	
i.	At	:	
ii.	Po	:	
iii.	District	:	
iv.	Postal Pin code	:	
3.	E-Mail ID	:	
4.	Mobile Number	:	
5.	Whats App Number	:	

Signature of the Bidder